

1) CONSTRUCTION: NOM. DIA.  
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"  
 INSULATION: POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS .062"  
 CABLE: (5) COLOR CODED SINGLES TWISTED TOGETHER WITH FILLER AND WRAPPED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE .170"  
 RIPCORD: INCLUDED UNDER JACKET FOR STRIPPING  
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS.  
OVERALL CABLE DIAMETER .234"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 105°C  
 WT./M', NOM., NET. 32.3 LBS.  
 JACKET IS SUNLIGHT RESISTANT

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL, NOM. 17 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 2000V RMS  
 VOLTAGE RATING, MAX. 600V  
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/1,000'


4) AGENCY APPROVALS:  
 CSA AWM FT4  
 UL AWM STYLE 2586 105C 600V

5) APPLICATION:  
 INDUSTRIAL CONTROLS, MEDICAL ELECTRONICS AND OTHER APPLICATIONS WHERE A COMPACT 600V RATED CABLE IS REQUIRED. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 E69976 AWM 2586 VW-1 -- CSA LL51726 AWM I/II A/B 105C 600V FT4 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK  
 2. BROWN  
 3. RED  
 4. ORANGE  
 5. YELLOW

8) PACKAGING  
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

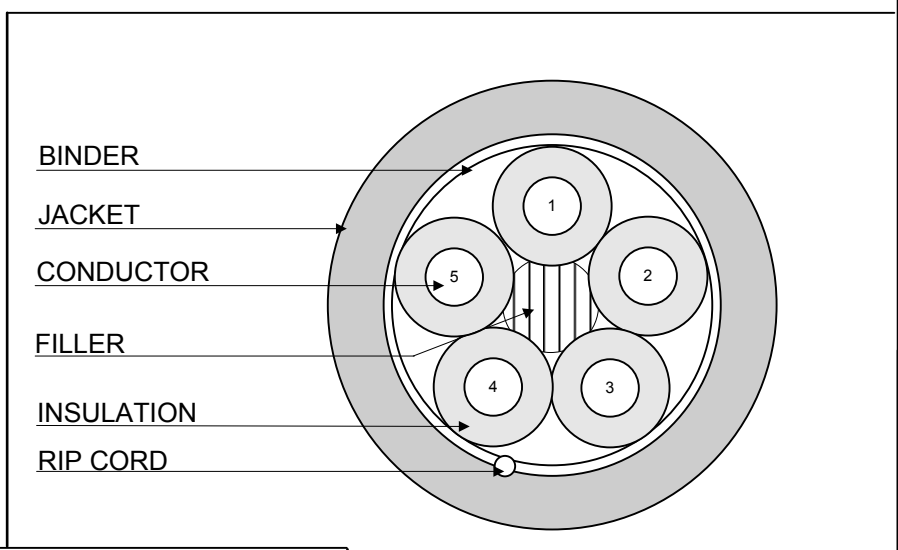

REVISION 02	DATE:	DRAWN B. M. DUCZYNSKI 5/9/05	
REVISED BY	<i>B. Duczynski</i> 10/9/09	CHECKED J. RIVERNIDER 5/13/05	
CHECKED	<i>J. Rivernider</i> 10/9/09	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 5/C 22 AWG -- AWM 2586 CSA AWM FT4 CABLE
			QUABBIN P/N 0704 1 OF 1