

1) CONSTRUCTION:

CONDUCTOR:	20 AWG 7/28 STRANDED TINNED COPPER	NOM. DIA.	.038"
INSULATION:	POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS		.070"
CABLE:	(2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A PAIR		.140"
SHIELD:	34 AWG STRANDED TINNED COPPER SPIRALLY WRAPPED AROUND THE TWISTED CONDUCTORS PROVIDING AN 85% MINIMUM COVERAGE		.153"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .025" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.203"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C, 80°C & 90°C
WT./M', NOM., NET.	26.0 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL NOM.	47 PF/FT.
CAPACITANCE, GROUNDED NOM.	79 PF/FT
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	10.4 Ω/1000'


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 UL AWM STYLE 2095  
 CSA CMG CUS

5) APPLICATION:  
 AUDIO, BROADCAST AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN P/N 6200R (UL) TYPE CM 20 AWG SHIELDED OR AWM 2095 -- CSA LL51726 TYPE CMG CUS 90C --  
 RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. RED X BLACK

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

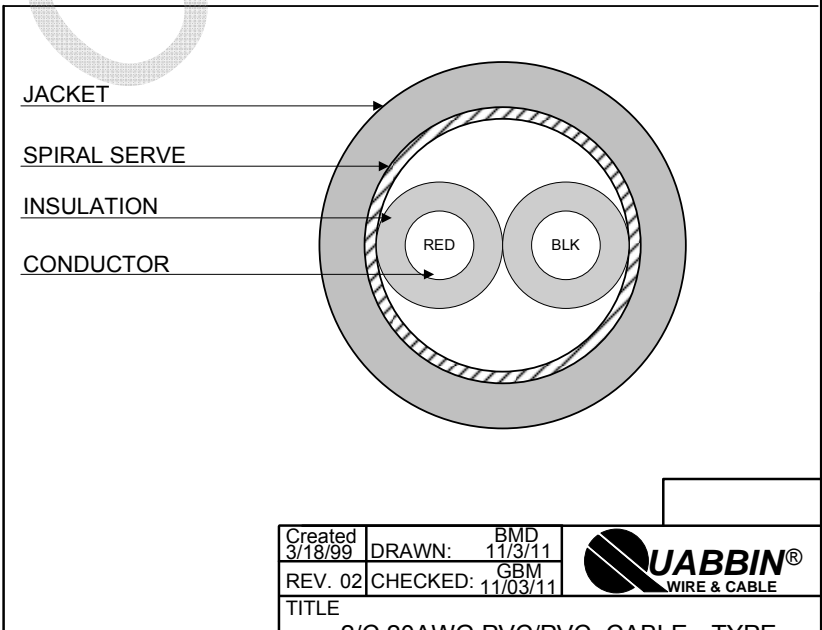

Created 3/18/99	DRAWN: BMD 11/3/11	
REV. 02	CHECKED: GBM 11/03/11	
TITLE		
2/C 20AWG PVC/PVC CABLE --TYPE CM, STYLE 2095, CSA CMG CUS		
QUABBIN P/N	6200	1 of 1

CUSTOMER APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_